



COLT 700 LSX 2S

4X4



683cc
DISPLACEMENT

43 HP
EFI ENGINE

4X4-4X2
W/ LOCK DIFFERENTIAL

60.5 INCH
WIDE TRACK



DIGITAL INSTRUMENT CLUSTER

Adjustable Clock settings, MPH/KMH, RPMs, Differential Lock Indicator, Odometer, and Trip Meter, Gear, Fuel Oil, and Engine Temperature indicator

Bluetooth



WIRELESS BLUETOOTH SPEAKERS

Adjustable Clock settings, MPH/KMH, RPMs, Differential Lock Indicator, Odometer, and Trip Meter, Gear, Fuel Oil, and Engine Temperature indicator



HALOGEN HEADLIGHTS

The BMS® Ranch Pony 700 Features halogen headlights providing brighter lights while using less energy and lasting significantly




HIGH ELEVATION PERFORMANCE TEST

The BMS® Colt 700 LSX has been submitted to a wide range of performance tests including a high altitude test in the Himalaya at (3,500m) 11,614 feet high. Performing consistently well

HEAVY-DUTY CVT-700 ENGINE

683cc 43 HP 1-Cylinder 4-stroke Fuel-injected Engine. Designed to ensure its maximum performance with class leading technologies such as Ni-SiC Cylinder, and Efficient cooling system 3-in-1 water, oil and air.

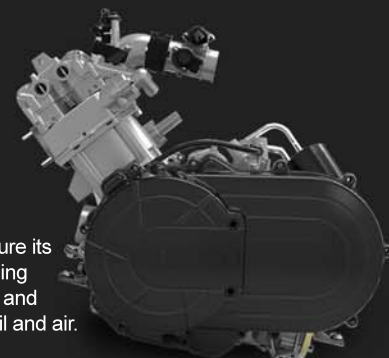

Fully Automatic CVT transmission with high and low gears provide more precise handling power for work or recreational use.

SIDE X SIDE

WWW.BMSMOTOR.COM

BEST IN-CLASS FULL-SIZE UTILITY SIDE X SIDE

- 683 cc / Single Cylinder/ SOHC / 43HP, EFI
- 4 stroke, 4 valves/ Oil & Water Cooled combined
- Fully Automatic CVT Belt-Driven W/ High & Low
- Equipped with Electric Power Steering
- Front and Rear Electric Winch (2500 lbs.Capacity)
- 4 Wheel Independent Suspension
- 4x4-4x2 W/ Locking Differential
- Bluetooth/FM radio/MP3/30W/ Digital Display
- Heavy Duty Front Bumper & Rear Hitch Ball Included
- Front & Rear Hydraulic Disc-Brakes
- Easy to Use Dump Bed (400 lbs Capacity)
- Pick-up Truck Style Rear Cargo Door Latch
- Windshield,Hard Rooftop,Aluminum Wheels Included
- 4 Fender Flares and 4 Swing Arm Rock Guards Included

SPECIFICATION	
ENGINE TYPE:	683cc 1-Cylinder, 4-Stroke, SOHC
COOLING SYSTEM	Oil and Water Cooled combine
BORE	102.00 mm
STROKE	84.00 mm
COMPRESSION RATIO	9.50:1
MAX POWER	43.HP / 5200 RPM
MAX TORQUE	62.00
MAX HORSE POWER (HP)	43 HP / 5200 RPM
STARTER SYSTEM	Electric & Recoil
IGNITION TYPE	EFI
LUBRICATION	Wet Sump
ENGINE OIL	SEA 10W-40 Capacity 2.22 US qt
TRANSMISSION	Fully Automatic CVT / L-H-N-R
OVERAL (L x W x H)	117 x 60.5 x 75
WHEEL BASE	75.30 (in)
GROUND CLEARANCE	11.20 (in)
SEAT HEIGHT	33 (in)
RIDER CAPACITY	2 person
DRY WEIGHT	1,200 lbs
GROSS WEIGHT	1,350 lbs
BRAKE (F / R)	4-Wheel Hydraulic Disc Brake
TIRE FRONT	AT25 x 8 - 12 Radial
TIRE REAR	AT25 x 10 - 12 Radial
FUEL TANK CAPACITY	7.40 gallon
SUSPENSION FRONT	Independent Double Swing Arm
SUSPENSION REAR	Independent Double Swing Arm
AGE RESTRICTION	16 years or older
LOAD CAPACITY	800 lbs
BATTERY	12V 30AMP
CLIMBING ABILITY	≥ 25°
PACKAGE L X W X H (in)	91.0 x 62 x 51
QTY FOR 40HQ	14

43

HORSEPOWER

60.5"

VEHICLE WIDTH

11.20"

GROUND CLEARANCE



FULLY LOADED WITH EPS SYSTEM POWER STEERING

Smooth and enhanced controlled steering for the best driving experience.



PICK UP TRUCK STYLE REAR CARGO DOOR

Upgraded with a Heavy-Duty Cargo Rail and Pick-up Truck Style Single Door Latch



2,500 LBS. CAPACITY REAR ELECTRIC WINCH

Standard Front Electric Winch 2,500 lbs. Capacity



FEATURE DETAIL



Front Electric Winch
2,500 lbs. Capacity



Wheel Fender Flares
Front and Rear Wheel Fender Flares



Adjustable Seats
with Safety seat Belts



Aluminum Alloy Rims
with Kingstone® All-terrain Tyres



LED Tail Lights
Brand New Style Tail lights



Double Windshield
With Ability to remove the lower or upper section



Independent Suspension
Front & Rear Independent suspension with double A-arms and brush guards



Front & Rear Disc Brake
Hydraulic disc brake pump



OAK-CAMO

RED

BLACK