



COLT 700 LSX 4S

4X4



683cc
DISPLACEMENT

43 HP
EFI ENGINE

4X4-4X2
W/ LOCK DIFFERENTIAL

59 INCH
WIDE TRACK



DIGITAL INSTRUMENT CLUSTER

Adjustable Clock settings, MPH/KMH, RPMs, Differential Lock Indicator, Odometer and Trip Meter, Gear, Fuel Oil and Engine Temperature indicator



WIRELESS BLUETOOTH SPEAKERS

The BMS® COLT 700 LSX 4S is Equipped with wireless Bluetooth media players, plays: FM Radio, MP3, USB/ft card port Max output 20Wx2



HALOGEN HEADLIGHTS


The BMS® COLT 700 LSX 4S Features halogen headlights providing a brighter lights while using less energy and lasting significance



COLT 700 LSX 4S HEAVY-DUTY CVT-700 ENGINE

Features 43 HP Single Over Head Cam (SOHC) 4-valve 4-stroke fuel-injected 683cc Engine.

Designed to ensure its maximum performance with class leading technologies such as Ni-SiC Cylinder, plus its efficient cooling system 3-in-1 water, oil and air. CVT transmission with high and low gears provide more precise handling power for work or recreational use

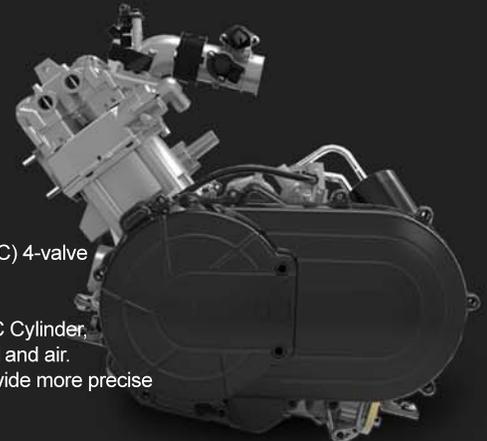

SIDE X SIDE

WWW.BMSMOTOR.COM

BEST IN-CLASS 4-SEAT FULL-SIZE UTILITY SIDE X SIDE

- 683 cc / Single Cylinder/ SOHC / 43HP, EFI
- 4 stroke, 4 valves/ Oil & Water Cooled combined
- Fully Automatic CVT Belt-Driven W/ High & Low
- Equipped with Electric power Steering
- Front and Rear Electric Winch (2500 lbs.Capacity)
- 4 Wheel Independent Suspension
- 4x4-4x2 W/ Locking Differential
- Bluetooth/FM radio/MP3/30W/ Digital Display
- Heavy Duty Front Bumper & Rear Hitch Ball Included
- Front & Rear Hydraulic Disc-Brakes
- Easy to Use Dump Bed (400 lbs Capacity)
- Pick-up Truck Style Rear Cargo Door Latch
- Windshield,Hard Rooftop,Aluminum Wheels Included
- 4 Fender Flares and 4 Swing Arm Rock Guards Included



SPECIFICATION	
ENGINE TYPE:	683cc 1-Cylinder, 4-Stroke, SOHC
COOLING SYSTEM	Oil and Water Cooling system
BORE	102.00 mm
STROKE	84.00 mm
COMPRESSION RATIO	9.50:1
MAX POWER	43.HP / 5200 RPM
MAX TORQUE	62.00
MAX HORSE POWER (HP)	43 HP / 5200 RPM
STARTER SYSTEM	Electric & Recoil
IGNITION TYPE	EFI
LUBRICATION	Wet Sump
ENGINE OIL	SEA 10W-40 Capacity 2.22 US qt
TRANSMISSION	Fully Automatic CVT / L-H-N-R
OVERAL (L x W x H)	148" x 60.5" x 78"
WHEEL BASE	108 inch
GROUND CLEARANCE	11.20 inch
SEAT HEIGHT	33 inch
RIDER CAPACITY	4 person
DRY WEIGHT	1,643 lbs.
GROSS WEIGHT	1,995.7 lbs
BRAKE (F / R)	4-Wheel Hydraulic Disc Brake
TIRE FRONT	AT25 x 8 - 12 Radial
TIRE REAR	AT25 x 10 - 12 Radial
FUEL TANK CAPACITY	7.40 gallon
SUSPENSION FRONT	Independent Double Swing Arm
SUSPENSION REAR	Independent Double Swing Arm
AGE RESTRICTION	16 years or older
LOAD CAPACITY	800 lbs
BATTERY	12V 30AMP
CLIMBING ABILITY	≥ 25°
PACKAGE L X W X H (in)	145.7 x 65 x 49.3
QTY FOR 40HQ	14

FULLY LOADED WITH EPS SYSTEM POWER STEERING

Smooth and enhanced controlled steering for the best driving experience.



PICK UP TRUCK STYLE REAR CARGO DOOR

Upgraded with a Heavy-Duty Cargo Rail and Pick-up Truck Style Single Door Datch



2,500 LBS. CAPACITY REAR ELECTRIC WINCH

Standard Front Electric Winch 2,500 lbs. Capacity



FEATURE DETAIL



Front Electric Winch
2,500 lbs. Capacity



Wheel Fender Flares
Front and Rear Wheel Fender Flares



Rear Bench Seat
Can fit up to 3 passengers



Aluminum Alloy Rims
with Kingstone® All-terrain Tyres



LED Tail Lights
Brand New Style Tail lights



Double Windshield
With Ability to remove the lower or upper section



Independent Suspension
Front & Rear Independent suspension with double A-arms and brush guards



Front & Rear Disc Brake
Hydraulic disc brake pump

43 HORSEPOWER **60.5"** VEHICLE WIDTH **11.20"** GROUND CLEARANCE



YELLOW CAMO

RED

BLACK